

UDP

▶ User Datagram Protocol (RFC 768)

- A wrapper protocol for IP to add port numbers
- 8 bytes

Source Port	Destination Port
Length	Checksum

Network Layer

Network Layer and IP

- ▶ Specific function - **routing**
- ▶ General functions:
 - Addressing: IP address
 - Error control: rerouting, ICMP
 - Flow control: ICMP
 - QoS: TOS field and Differentiated Services

ICMP - Internet Control Message Protocol, TOS - Type of Service


Internet Protocol (IP)

- ▶ Provides **unreliable, connection-less service**
- ▶ That is, packets may be:
 - lost
 - delivered out of order
 - duplicated
 - mutilated

IP Design Goals


- ▶ Fields for source and destination IP addresses
- ▶ Means for error control:
 - detection of packet header corruption (L2 does the heavy lifting)
 - limiting the lifespan of a packet
- ▶ Fragmentation
 - carrying transport layer messages that are longer than what L2 can support

IPv4 Header

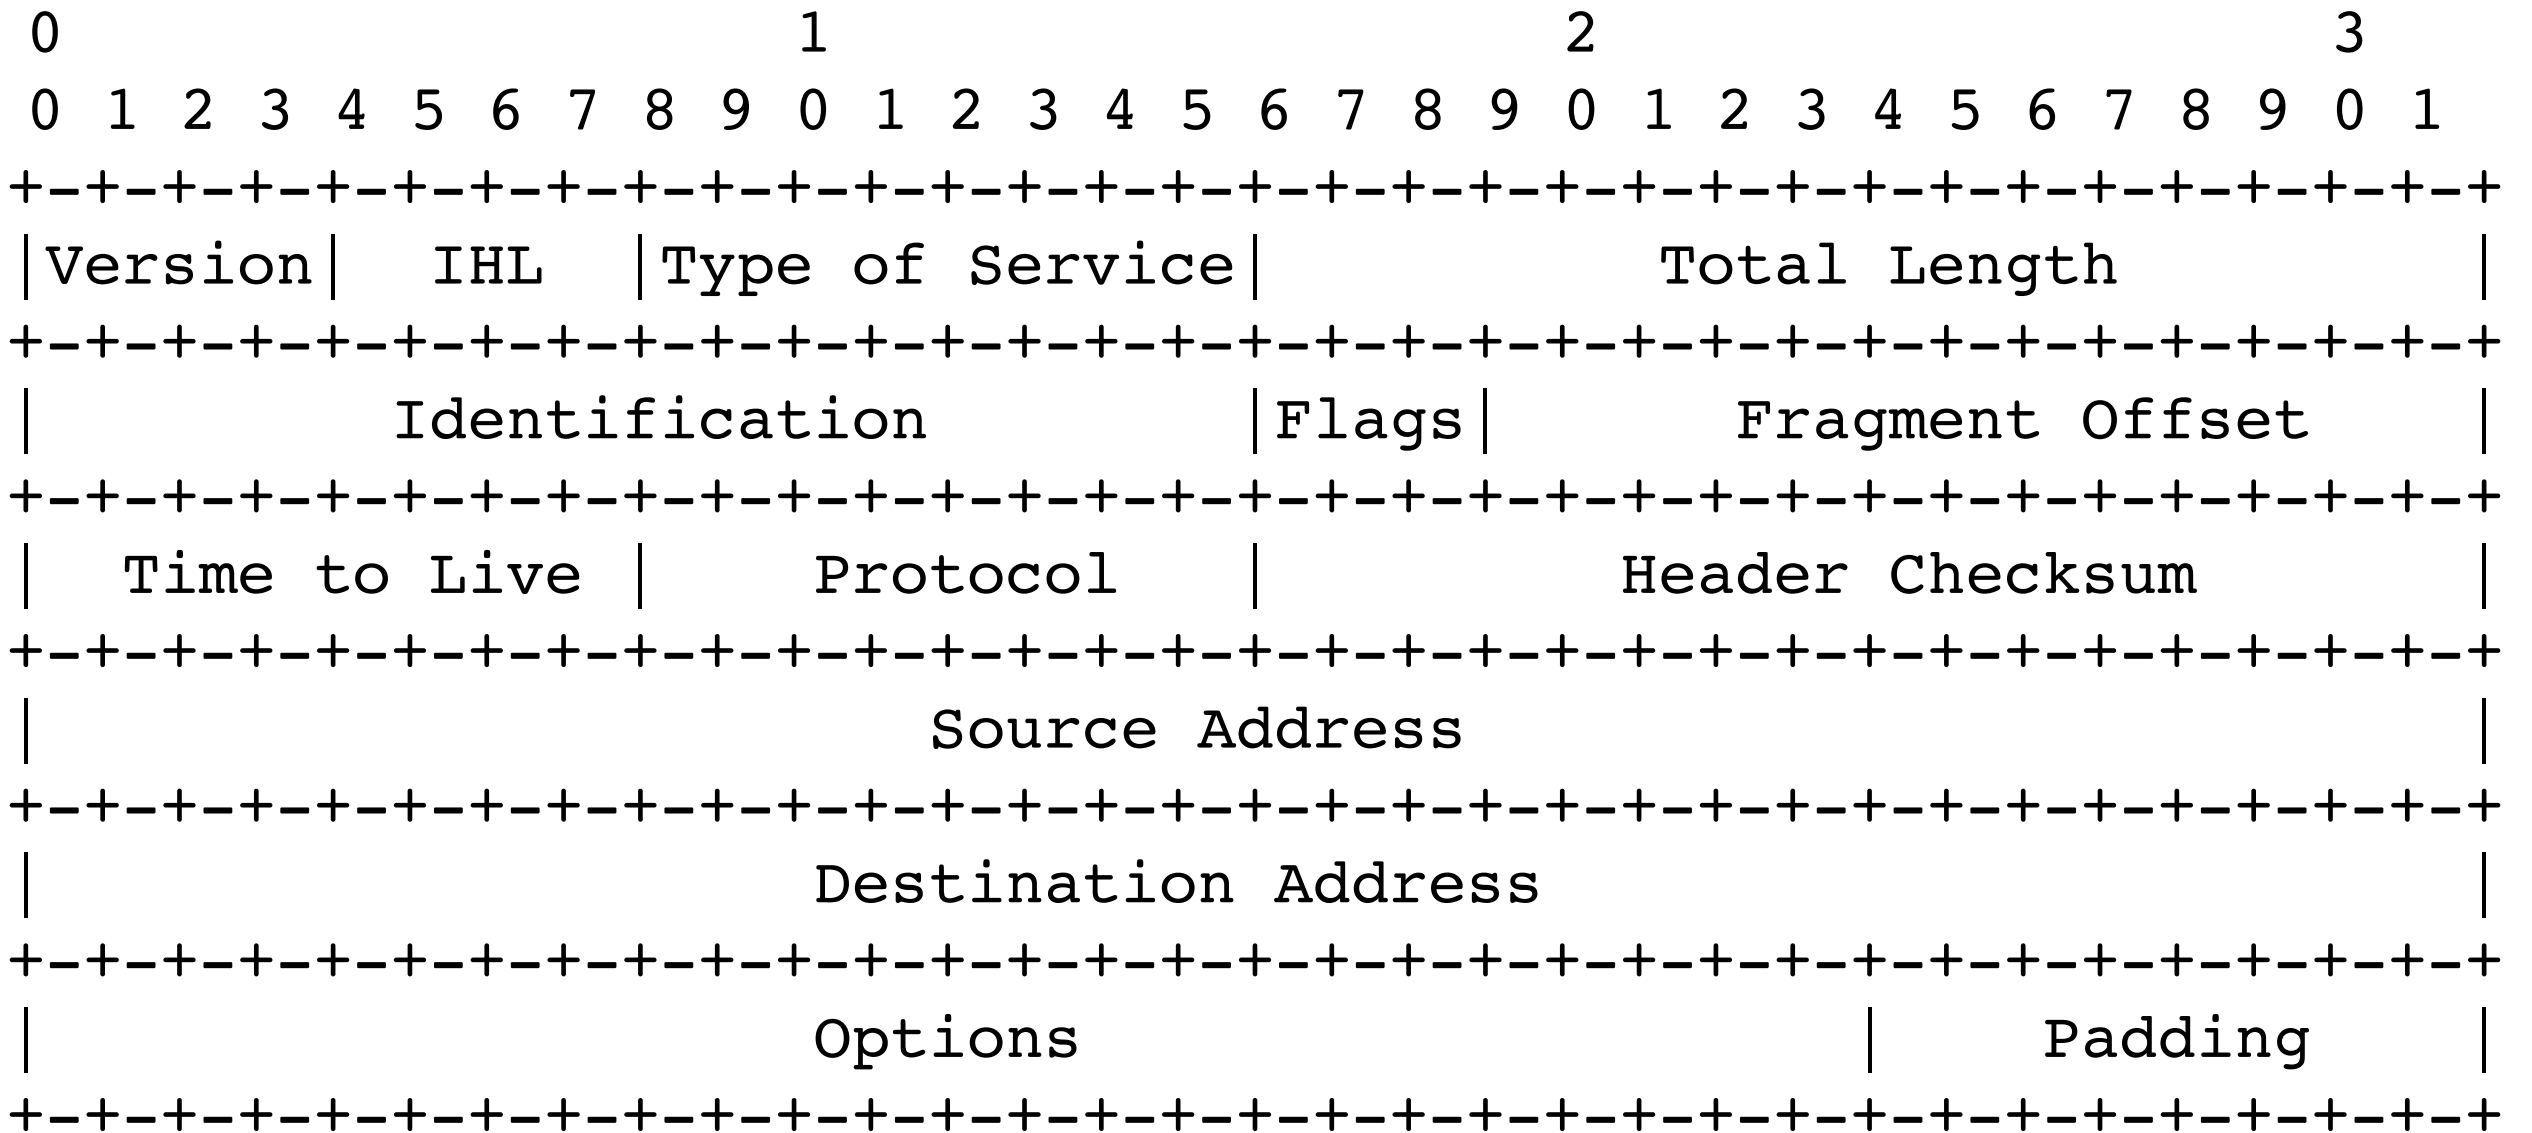

Source: RFC 791

IPv4 Header

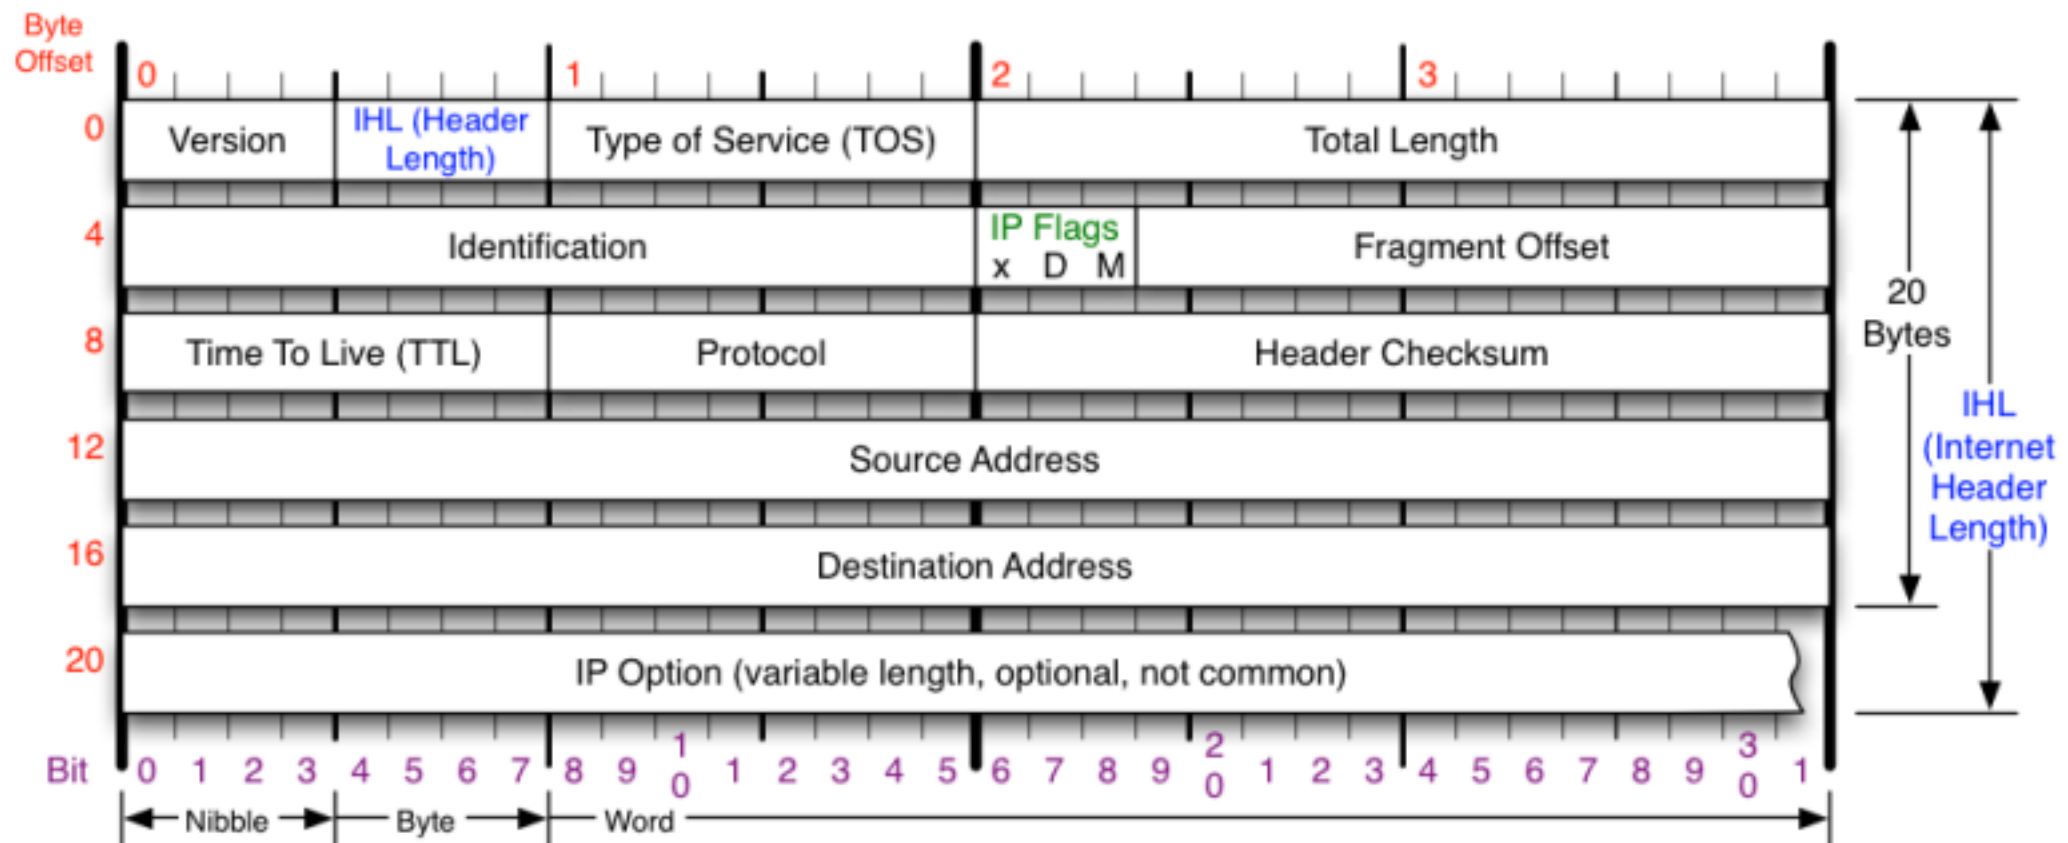


Version Version of IP Protocol. 4 and 6 are valid. This diagram represents version 4 structure only.	Protocol IP Protocol ID. Including (but not limited to): 1 ICMP 17 UDP 57 SKIP 2 IGMP 47 GRE 88 EIGRP 6 TCP 50 ESP 89 OSPF 9 IGRP 51 AH 115 L2TP	Fragment Offset Fragment offset from start of IP datagram. Measured in 8 byte (2 words, 64 bits) increments. If IP datagram is fragmented, fragment size (Total Length) must be a multiple of 8 bytes.	IP Flags x D M x 0x80 reserved (evil bit) D 0x40 Do Not Fragment M 0x20 More Fragments follow
Header Length Number of 32-bit words in TCP header, minimum value of 5. Multiply by 4 to get byte count.	Total Length Total length of IP datagram, or IP fragment if fragmented. Measured in Bytes.	Header Checksum Checksum of entire IP header	RFC 791 Please refer to RFC 791 for the complete Internet Protocol (IP) Specification.

DIFFERENTIATED SERVICES

(DIFFSERV)

DOMAIN-BASED

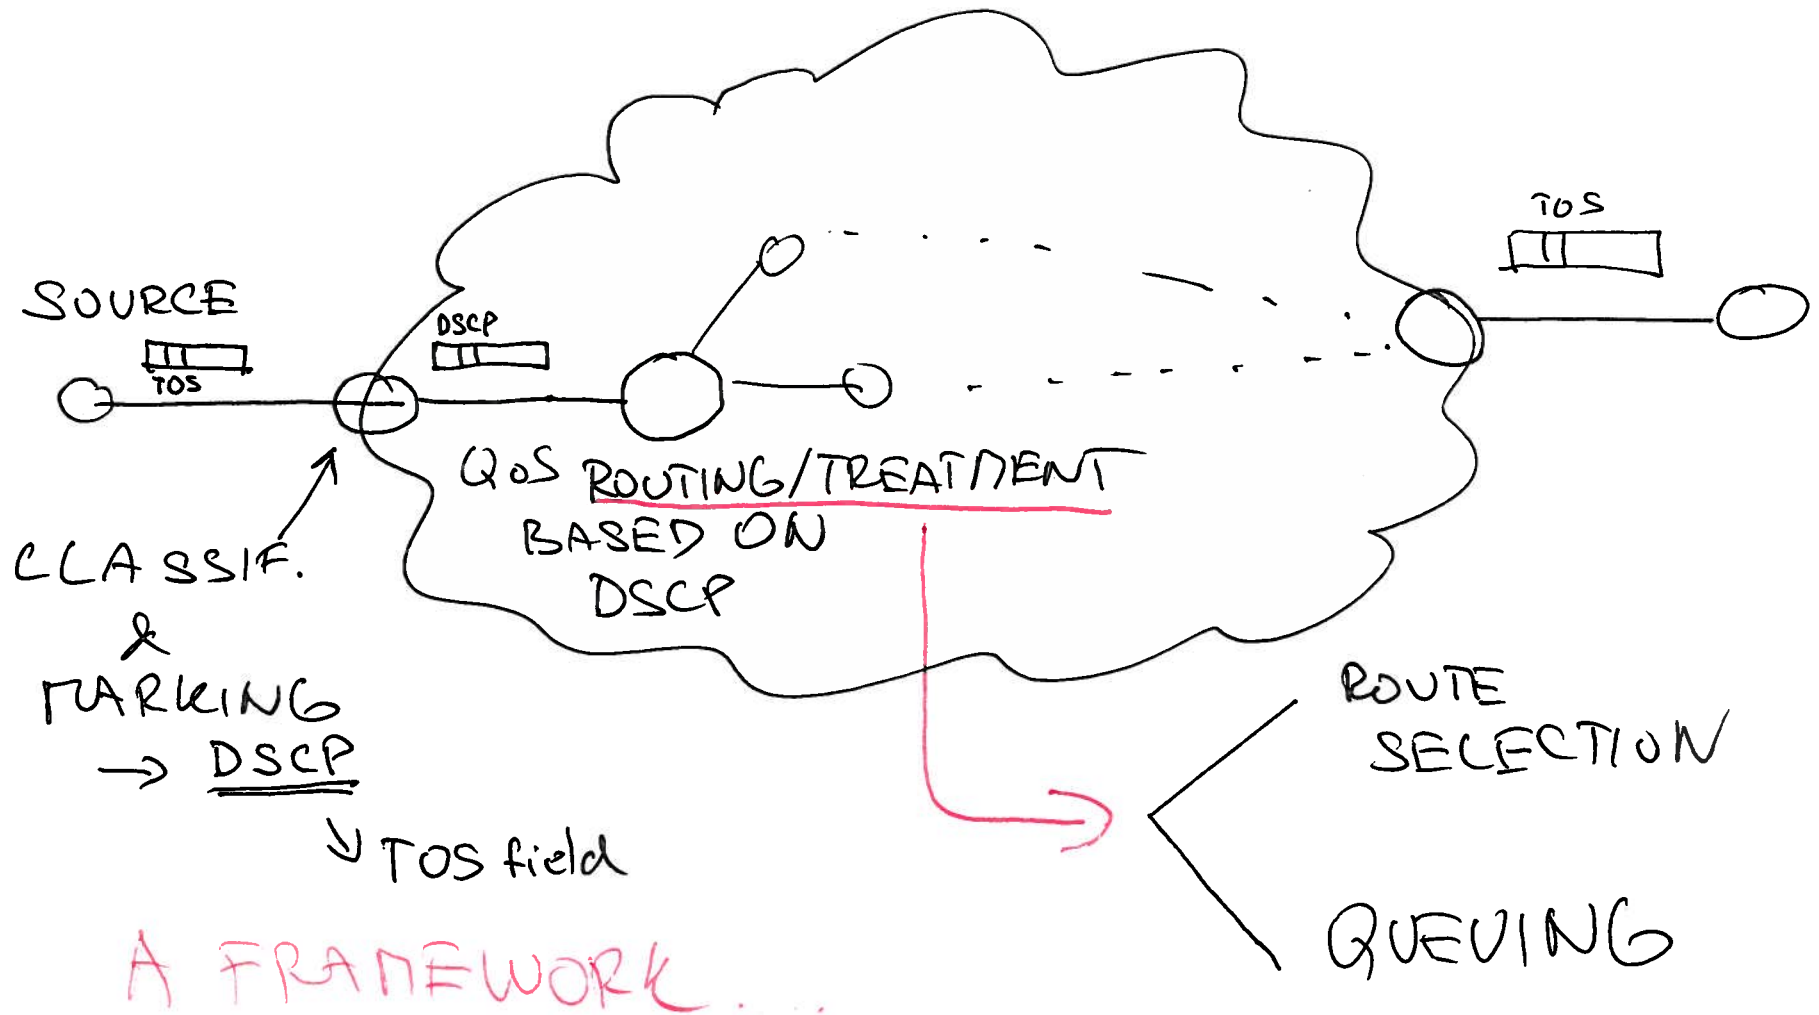

Fragmentation

▶ Problem:


- network layer needs to deliver a PDU* that is longer than what the link layer permits

▶ Solutions:


- do nothing
- drop and inform (default behavior of IPv6)
- break the PDU to smaller units (fragments) and reassemble them at the destination (default behavior of IPv4)

* PDU - protocol data unit, a fancy term for *packet*

IPv4 Fragmentation

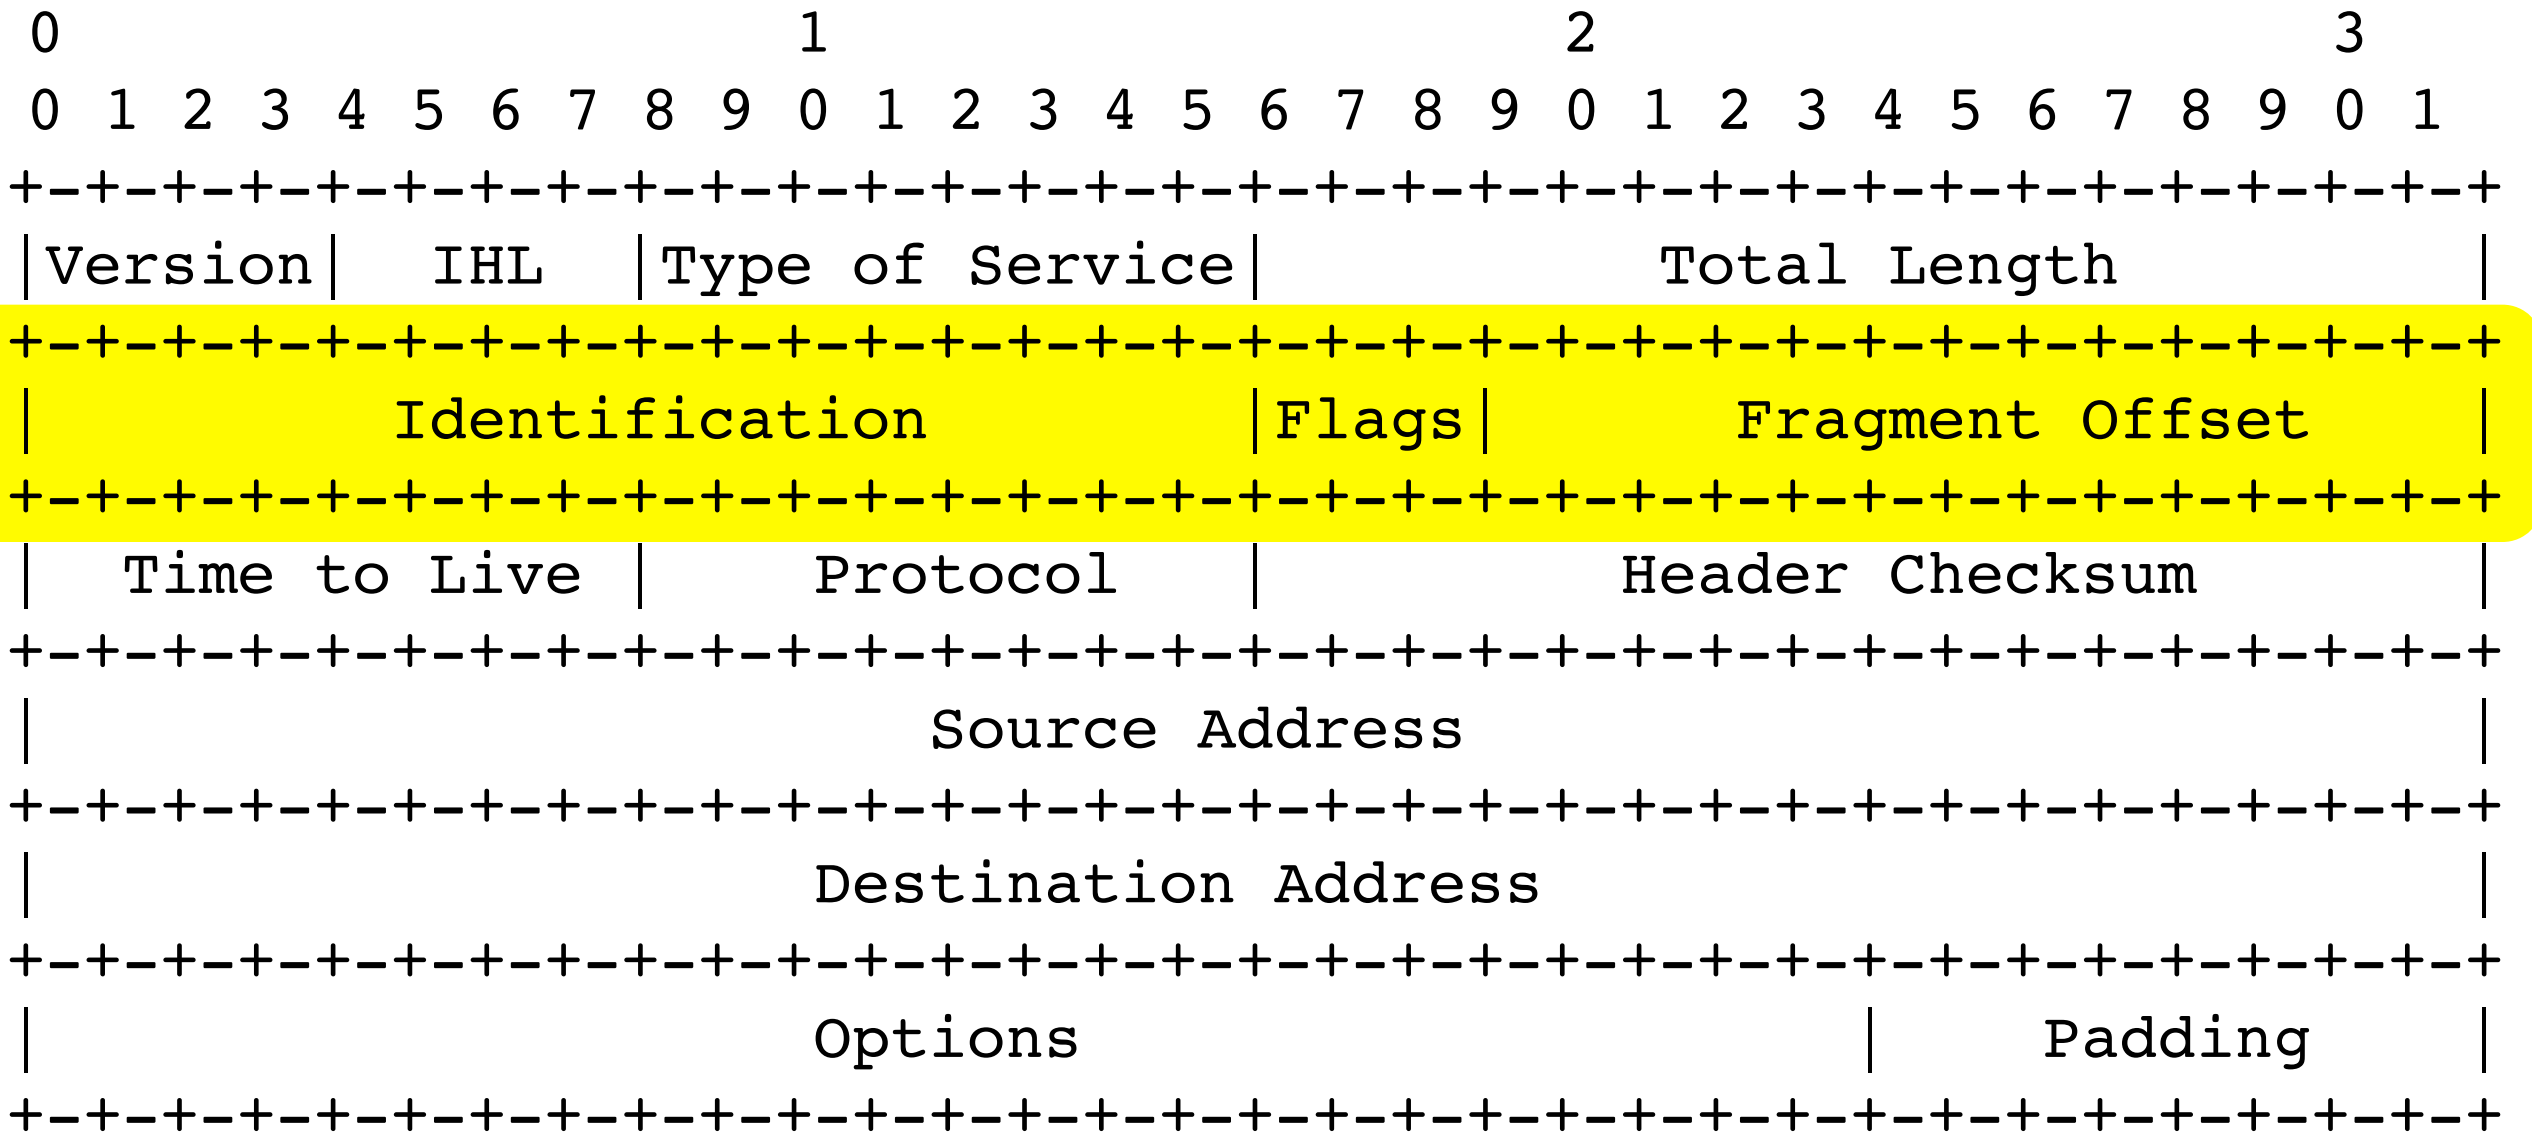

IPv4 Fragmentation

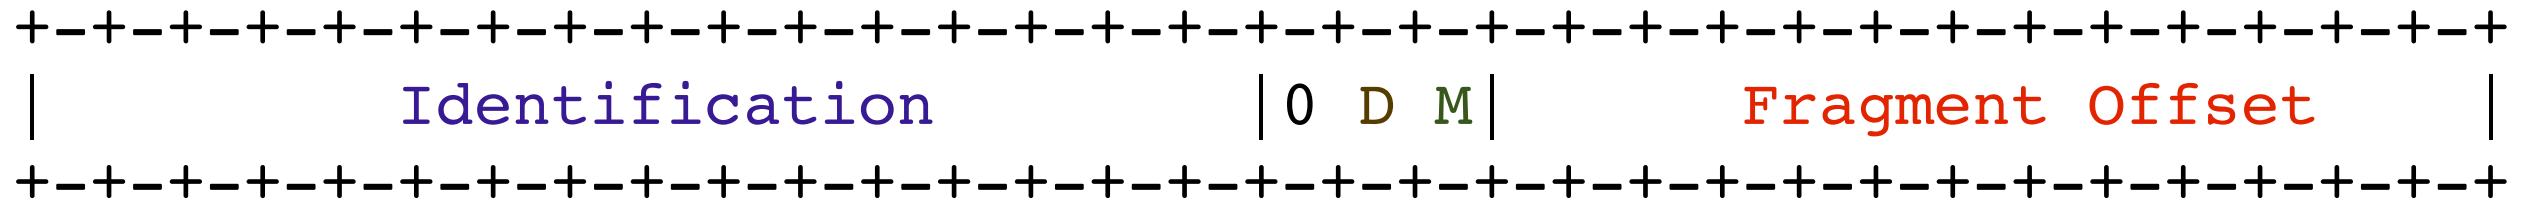

► Identification (16 bits)

- identifies the original fragmented packet

► Fragment Offset (13 bits)

- specifies the location of the fragment in the packet
- only 13 most significant bits of the 16 bit value stored in the field, the remaining must be 0

► M (1 bit) - More Fragments

► D (1 bit) - Do Not Fragment

Fragmentation -

Packet length 4,500 bytes, MTU 2,500 bytes:

Fragment	Total bytes	Header bytes	Data bytes	"More fragments" flag	Fragment offset (bytes)
1	2500	20	2480	1	0
2	2040	20	2020	0	310

Fragments above reaching a link with MTU 1,500 bytes:

Fragment	Total bytes	Header bytes	Data bytes	"More fragments" flag	Fragment offset (bytes)
1	1500	20	1480	1	0
2	1020	20	1000	1	185
3	1500	20	1480	1	310
4	560	20	540	0	495

* Example shamelessly stolen from Wikipedia
([http://en.wikipedia.org/wiki/
IPv4#Fragmentation and reassembly](http://en.wikipedia.org/wiki/IPv4#Fragmentation_and_reassembly))